



## Pump series FP2 & FP3

### Typical characteristics

- **EHEDG** certified
- Robust executed hygienic process pump in stainless steel 316L.
- **Energy saving** and very **low NPSH**.
- Modular concept composed with standard components.
- Simplicity in maintenance.
- **Electropolished**.


### Technical data

Max. flow	320 m <sup>3</sup> /h
Max. head	12 bar
Max. product viscosity	500 cP
Motor power up to	90 kW

### Applications

The Packo process pumps of the **FP2 and FP3** series are used in the most demanding hygienic applications in almost all industries such as dairies, breweries, beverage industry, distilleries, etc. These perfectly cleanable process pumps are the ideal reliable component for filtration applications, pasteurisation, yeast propagation and for CIP cleaning systems as well. **Typical applications** include filtration of beer, wine and fruit juices as well as pumping yeast, whey, curd, CIP, etc.

Performance Pump series FP2 & FP2+

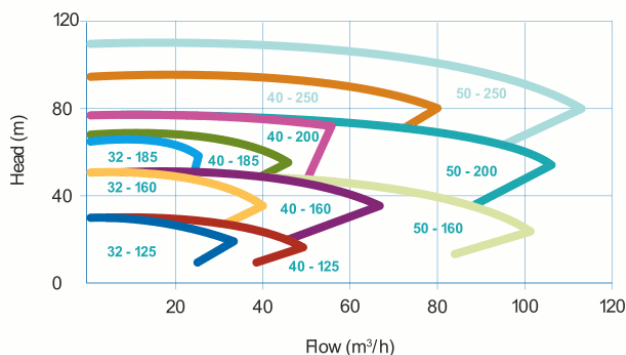

Performance Pump series FP3

