

EasyDose G2

The next generation



Liquid Nitrogen Injection system named for its simplicity of installation and operation.


Features

- Discrete dosing speed up to 450 CPM and continuous stream thereafter
- Siemens S7-1200 or Allen Bradley ML 1100 PLC platforms
- Minimum dose duration, 25ms
- Smartsync Technology
- Siemens KTP 600 or Allen Bradley Panel View 600 Touchscreen
- Automatic synchronization with speed and dose compensation
- Integrated Ethernet
- Five recipe storage
- Five on-board languages
- Accurate to +/- 3% dose weight
- Maximum direct LN₂ feed pressure, 22 psi (1.5 bar)
- Self-monitored with alarm outputs
- High cycle-life electric dosing valve
- Lowest dosing pressure 0.3 psi (0.02 bar)
- Self-Generating N₂ purge
- Sub-cooled LN₂ to improve dosing accuracy
- Optional CIP protection against freeze-ups
- Optional 3-D dose dispersion technology

**VACUUM
BARRIER VBC**
CORPORATION

Liquid Nitrogen Handling Specialists Since 1958

EasyDose G2

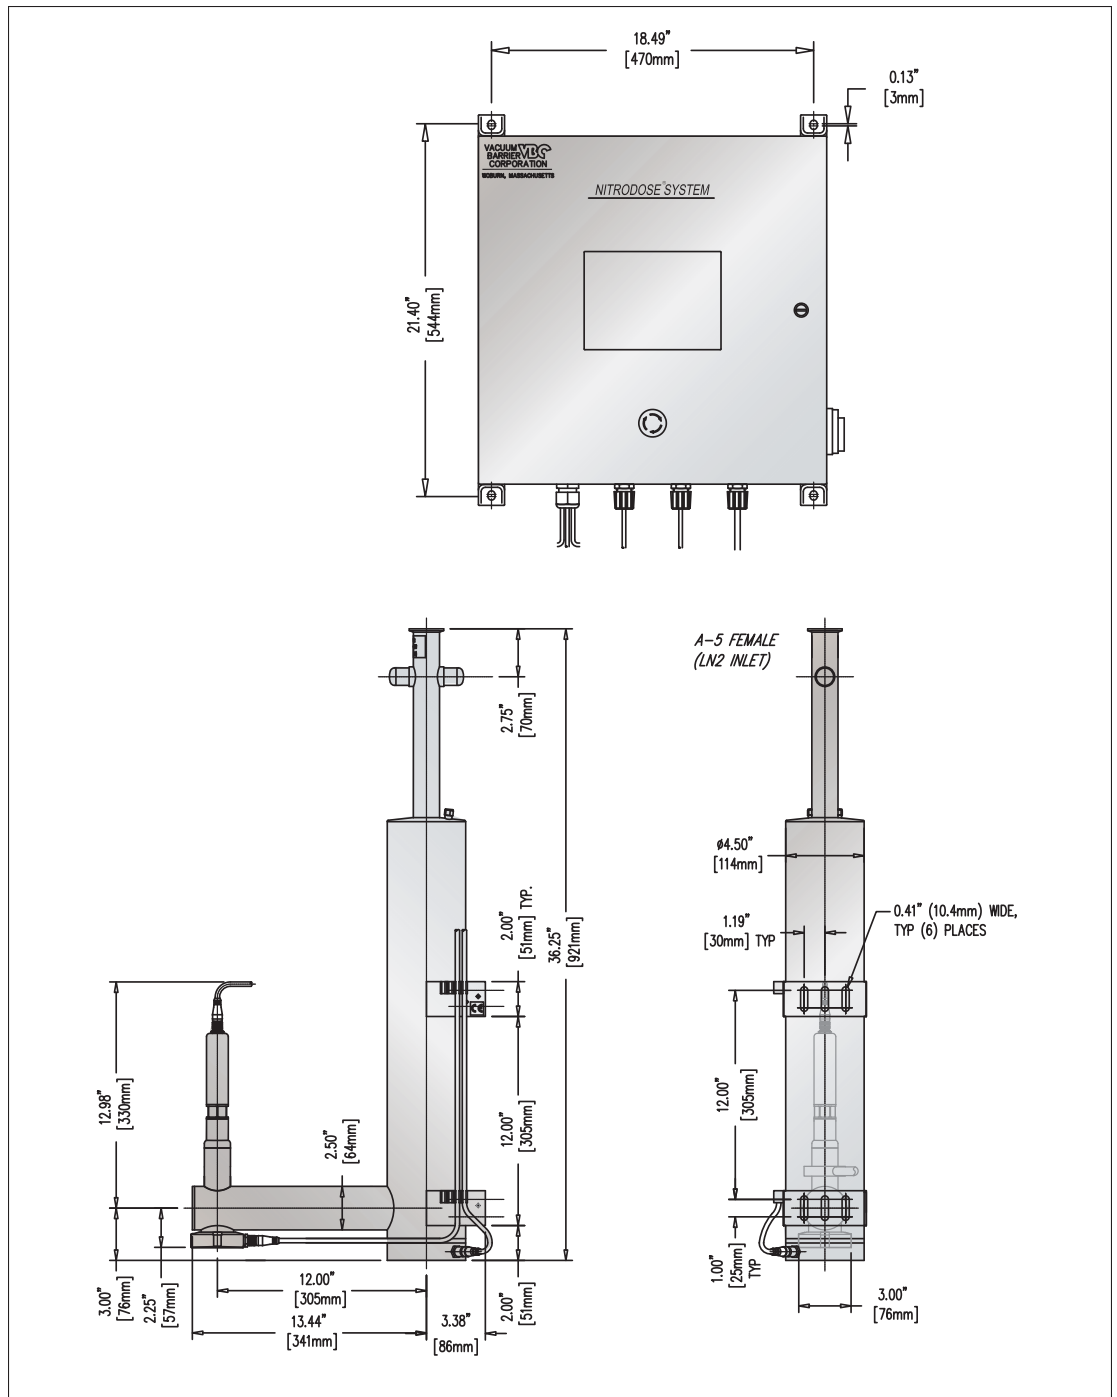

VACUUM BARRIER VBC
CORPORATION

4 Barten Lane, Woburn, MA 01801
Tel 1-781-933-3570
Fax 1-781-932-9428
email: sales@vacuumbarrier.com
www.vacuumbarrier.com



VacuumBarrierSystems

Rue de l'Atelier, 4
B-1480 Tubize - Belgium
Tel +32 2 354 71 77
Fax +32 2 354 72 22
email: sales@vbseurope.com
www.vbseurope.com